


LOCKSTOP

Mastic Waterstop for Concrete Construction

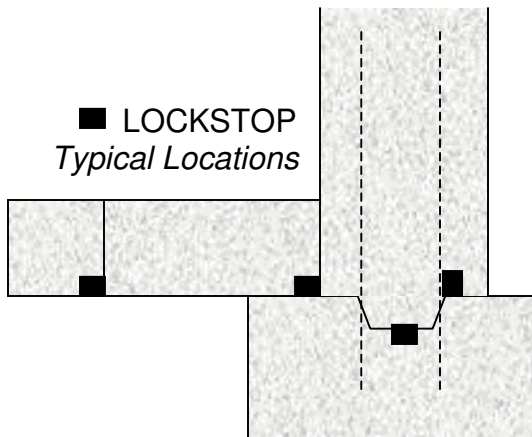

LOCKSTOP single component, self-sealing mastic waterstop prevents moisture from penetrating NON-MOVING joints in concrete construction.

Fast and easy to install in all working temperatures, LOCKSTOP requires no special labor skills. LOCKSTOP provides a lasting, watertight bond to concrete surfaces.

Typical Applications

- Storage tanks
- Culverts
- Pipe and penetrations
- Retaining walls
- Slabs-on-grade
- Foundations

Advantages

- Easy to install, requiring no specialized labor
- Applies in most weather conditions and temperatures
- Available in rolls to speed installation and minimize splicing
- Stays tacky and bonds to concrete with Lockstop Primer Adhesive
- No mechanical fasteners or split forming required
- Requires minimum concrete cover and does not create pressure which could potentially spall the concrete

Application Instructions

- 1) Brush and remove loose dirt and particles from the concrete surface/
- 2) Brush one coat of Lockstop Primer Adhesive to the clean and dry concrete surface...the length of the application and approximately two inches wide.
- 3) Allow the primer to dry for two hours.
- 4) Press LOCKSTOP firmly onto the primed surface. Achieve a spread of about 25% of the material width.
- 5) Join ends of the coils by overlapping about one inch of the material. Press ends together until there is no separation or air pockets
- 6) The surface area is now ready to receive the second pour of concrete. Separation paper should be removed just prior to the second pour.

LOCKSTOP IS NOT an expansion joint material and **SHOULD NOT** be used as one. Expansion joints must be sealed with a conventional waterstop designed to accommodate movement. **Contact Greenstreak for waterstop materials suitable for expansion joints.**

Dimensions
1" X 3/4"
16'-8" rolls

LOCKSTOP is packaged
6 rolls per carton and each
carton weighs 50 lbs.

GREENSTREAK

3400 Tree Court Industrial Blvd.
St. Louis, MO 63122
Ph (800) 325-9504 or (636) 225-9400
Fx (800) 551-5145 or (636) 225-2049

WARRANTY: GREENSTREAK warrants that this product will be free from defects and will perform as represented in writing, provided the application of the product and concrete construction practices used are in accordance with the manufacturer's recommendations and application and installation instructions. GREENSTREAK will refund the purchase price of any product proven defective but shall in no way be liable for indirect, consequential, special or resultant damages whether due to breach of warranty or negligence. GREENSTREAK makes no guarantee or warranty expressed or implied, including, without limitation, warranties of fitness or merchantability, with respect to this product.

NOTICE: the information presented here is believed to be correct. However, since it is provided without charge and without specific knowledge of the intended use or application of its product, GREENSTREAK assumes no obligation or liability with respect to such use or application, and makes no warranty either expressed or implied as to the application or use of such product, or to the use or infringement of any patent or other proprietary rights of GREENSTREAK or others with respect to such application or use.